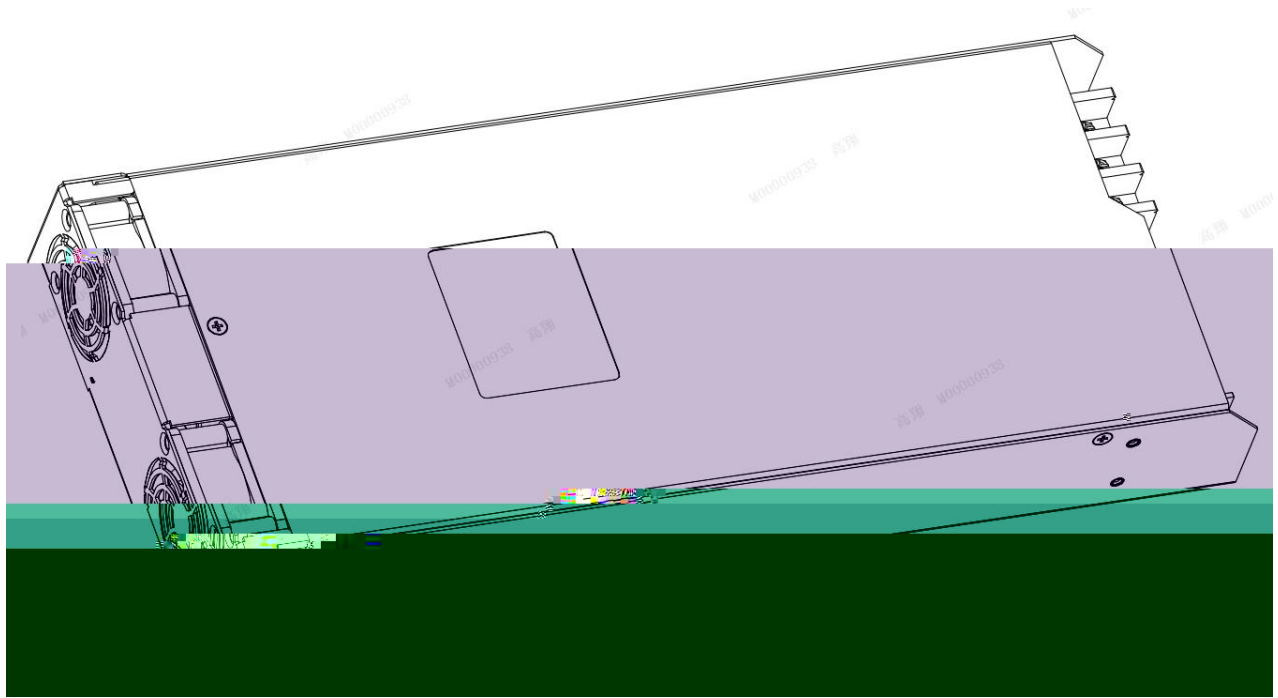

EMC



AC/DC

- 1 : -15°C to +45°C
- 2 : -40°C to +85°C
- 3 : 95%
- 4 3000
- 5 3000
- 6 70~106KPa
- 7
- 8

1		Vac	180	220	280	
2		Hz	45	50	65	
3		A			24	
4		A			60	264V
5	PF			0.95		
6	I THD	%				

		/				
	V		285	/	320	10%
	V		260	/	290	
	V		140	/	160	10%
	V		160	/	180	
	V				78	
	A				53	
	A					
48V	V		51		58	
48V	A		12		18	
48V	A					
24V1	V		27		32	
24V1	A		6		18	
24V1	A					
+15V	V		19		22	
± 15V	A		3		5	
± 15V	A					

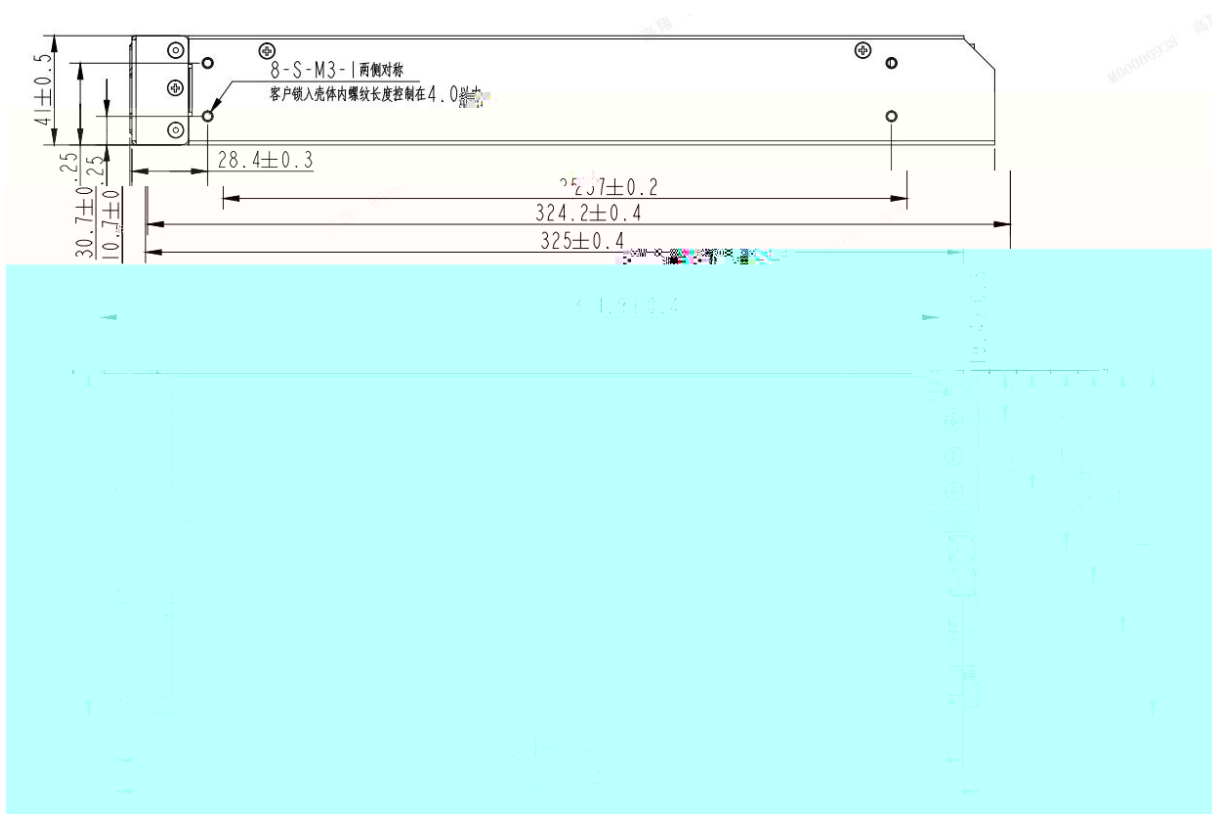
1

2000Vac	2000Vac /1

(CE)	CLASS A	EN55022
(RE)	CLASS A	
	± 6KV ± 8KV Class B	:IEC61000-4-2;
	± 8KV ± 10KV Class B	IEC61000-4-2;
CS)	IEC61000-4-6 LEVEL3 Class A	
(RS)	IEC61000-4-3 LEVEL3 Class A	
(EFT)	IEC61000-4-4 LEVEL4 Class A	
	IEC61000-4-5 LEVEL4 Class A	2KV, 4KV
	IEC61000-4-11 70%U 100ms, 0%U 10ms, 0°	Class B

Class A
 Class B
 Class C
 Class D

1		1.5	60dB A	1
2	MTBF	100000H	Telcordia SR332	
3		*5 9Hz 3.5mm 9 200 Hz 10m/s2,3	5 3*50	
4		250m/s2	6ms 6	
5		500		
6				
7		RoHs2.0		
8		L/N/PE 5Min	L1/L2/L3 2Min 10	
9		ISO 13849-1 2006		PL-E



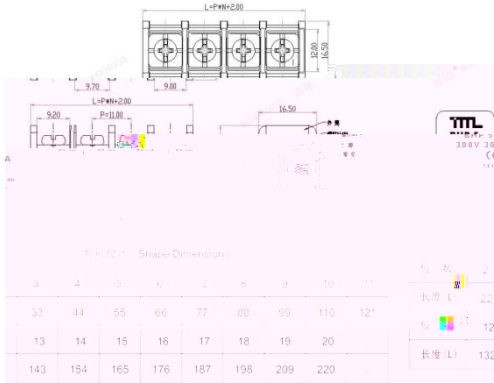



× × 325*130*41mm
()

	(BHP5-03-11.0-01)	1	L	AC
		2	N	AC
		3	PE	

	L (AT448080-1)		Vout1-	
			Vout1+	

	CJT C3030WR-2*7P	1/8/9	48VGND	48V	24/48V
		2/3/10	48V	48V	
		4/11	24V1GND	24V1	
		5/12	24V1	24V1	± 15V
		6/7	VCOM	± 15V	
		13	+15V	+15V	
		14	-15V	-15V	

	A2008WR-S1-F-2x4P	1	GND	ON/OFF	24/48V
		2	AC_OK	OK ,	0.5V 4.5V 5.25V.
		3	DC_OK	OK ,	0.5V 4.5V 5.25V.
		4	GND	ON/OFF	24/48V
		5	ON/OFF	SW	0.7V
		6	PE_OK	PE OK , PE	0.5V 4.5V 5.25V.
		7	GND	ON/OFF	24/48V
		8	NC		

		(
	(BHP5-03-11.0-01)	
	L (AT448080-1)	
	CJT C3030WR-2*7P	
	A2008WR-S1-F-2x4P	

20cm

-40 +70°C

≤90%

50cm

2

GB/T 2423.1-2008	2	A		
GB/T 2423.2-2008	2	B		
GB/T 2423.3-2016	2	Cab		
GB/T 2423.4-2008	2	Db	(12h 12h)	
GB/T 2423.5-1995	2	Ea		
GB/T 2423.6-1995	2	Eb		
GB/T 2423.8-1995	2	Ed		
GB/T 2423.10-2008	2	Fc	()	
GB/T 2423.11-1997	2	Fd		—
GB/T 2423.22-2012	2	N		
EN 55032-2015	—			—
GB/ T 17626.2-2018				
GB/ T 17626.3-2016				
GB/ T 17626.4-2018				
GB/ T 17626.5-2019			()	
GB/ T 17626.6-2017				
GB/ T 17626.8-2006				
GB/ T 17626.11-2008				
GB/T 17625.8-2015/IEC61000-3-12:2004			16A	75A
GB/Z 17625.3-2000			16A	
GB/T 17625.7-2013			75A	
GB 4943.1-2011	1			
GB/ T 4798.1-2005			1	
GB/ T 4798.2-2008			2	